

Rock


ceiling | wall 9cm ip20



Characteristics (UE)

Lamp	LED
Power	4W
Total flux	350Lm
Efficacy	87,5Lm/W
Colour temp.	3000K
Beam angle	360°
CRI	≥ 85
IP	IP20
Protocol	On-off
Driver	no driver
Voltage	220-240V
Guarantee	5 years
Battery	-
Cable length	-

Dimensions

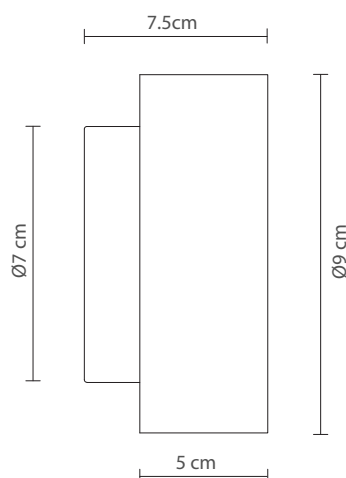

Materials

Aluminium base and alabaster shade

Finishing

Black base / Alabaster shade

Certificates



Robin

www.robinlamps.com

Rock


ceiling | wall 9cm ip44



Characteristics (UE)

Lamp	LED
Power	4W
Total flux	350Lm
Efficacy	87,5Lm/W
Colour temp.	3000K
Beam angle	360°
CRI	≥ 85
IP	IP44
Protocol	On-off
Driver	no driver
Voltage	220-240V
Guarantee	5 years
Battery	-
Cable length	-

Dimensions

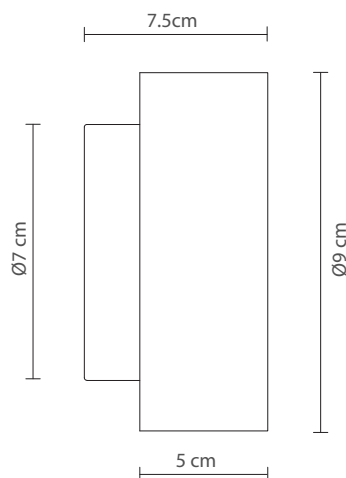

Materials

Aluminium base and alabaster shade

Finishing

Black base / Alabaster shade

Certificates



Robin

www.robinlamps.com

Rock


ceiling | wall 14cm ip20



Characteristics (UE)

Lamp	LED
Power	4W
Total flux	350Lm
Efficacy	87,5Lm/W
Colour temp.	3000K
Beam angle	360°
CRI	≥ 85
IP	IP20
Protocol	On-off
Driver	no driver
Voltage	220-240V
Guarantee	5 years
Battery	-
Cable length	-

Dimensions

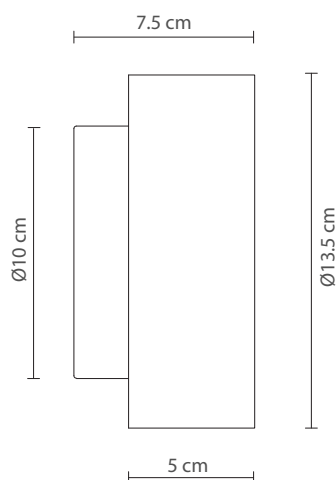

Materials

Aluminium base and alabaster shade

Finishing

Black base / Alabaster shade

Certificates



Robin

www.robinlamps.com

Rock


ceiling | wall 14cm ip44



Characteristics (UE)

Lamp	LED
Power	4W
Total flux	350Lm
Efficacy	87,5Lm/W
Colour temp.	3000K
Beam angle	360°
CRI	≥ 85
IP	IP44
Protocol	On-off
Driver	no driver
Voltage	220-240V
Guarantee	5 years
Battery	-
Cable length	-

Dimensions

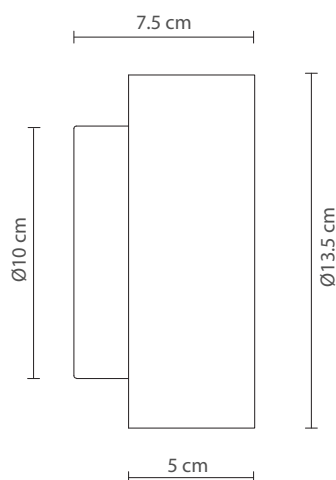

Materials

Aluminium base and alabaster shade

Finishing

Black base / Alabaster shade

Certificates



Robin

www.robinlamps.com