



BY CHICAGO ATHENAEUM



reddot design award
winner



GOOD
DESIGN
AWARD
TOKYO



Dawn

Morning light

Turning dark to dawn one light at a time

Dawn is the perfect luminaire for all romantics who love soft early morning light. Unlike other luminaires which have their light source located in the centre, Dawn hides its source behind the edge and only reveals soft uniform illumination, comparable to the morning dawn.

Dawn boasts elegant details such as a single piece frame, delicate edge design and 100% clean interior, with no visible elements. It's a luminaire that pays attention to the details by turning a power cable to an eye-catching element and it's a perfect example of how to elevate a standard decorative product to a unique lighting experience.

Trasforma il buio in un'alba, con un solo prodotto

Dawn è l'apparecchio perfetto per i romantici che amano la tenue luce del primo mattino. A differenza di altri prodotti dotati di sorgente al centro del diffusore, Dawn nasconde la sorgente all'interno del bordo, regalando un'illuminazione morbida e uniforme, paragonabile all'alba del mattino.

Gli eleganti dettagli di Dawn sono un telaio monoblocco, un design sinuoso con interni pulitissimi, assenza di elementi visibili. La cura del dettaglio si esprime anche attraverso il cavo di alimentazione che diventa un elemento veramente affascinante, tipico esempio di come elevare un comune prodotto decorativo a un'esperienza di illuminazione unica.

Transformer l'obscurité en aube en une seule lumière

Dawn est le luminaire parfait pour tous les romantiques qui aiment la douce lumière du matin. Contrairement à d'autres luminaires dont la source lumineuse est située au centre, la source de Dawn est dissimulée derrière le bord et ne révèle qu'un éclairage doux et uniforme, comparable à celui de l'aube du matin.

Dawn se démarque par des détails élégants tels qu'un cadre d'un seul tenant, une bordure au design raffiné et un intérieur 100 % lisse, sans éléments visibles. C'est un luminaire qui est soucieux des détails en transformant un câble d'alimentation en un élément qui attire l'œil et c'est un exemple parfait de la façon de transformer un produit décoratif standard en une expérience d'éclairage unique.









MAIN FEATURES






Made from a single piece

There are no joints. Dawn is made out of a single piece of aluminium which makes its surface even smoother, more uniform and sophisticated.

Soft diffused light without a diffuser

Dawn reveals a soft, uniform and reflected light with no hard shadows and contrasts.

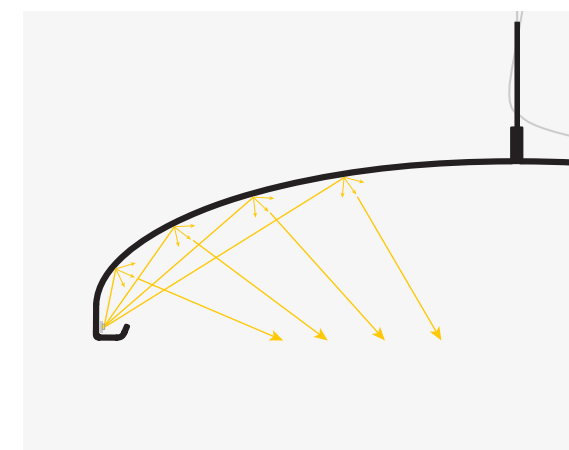

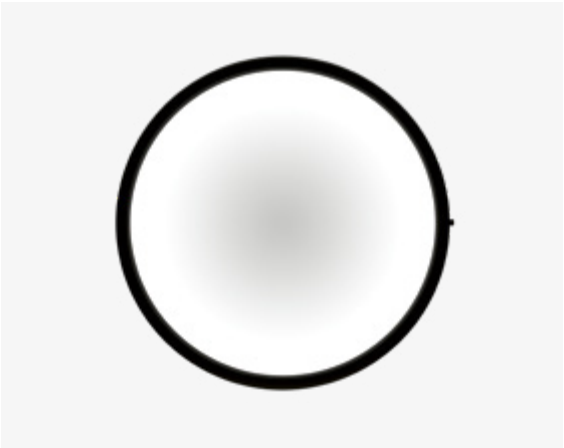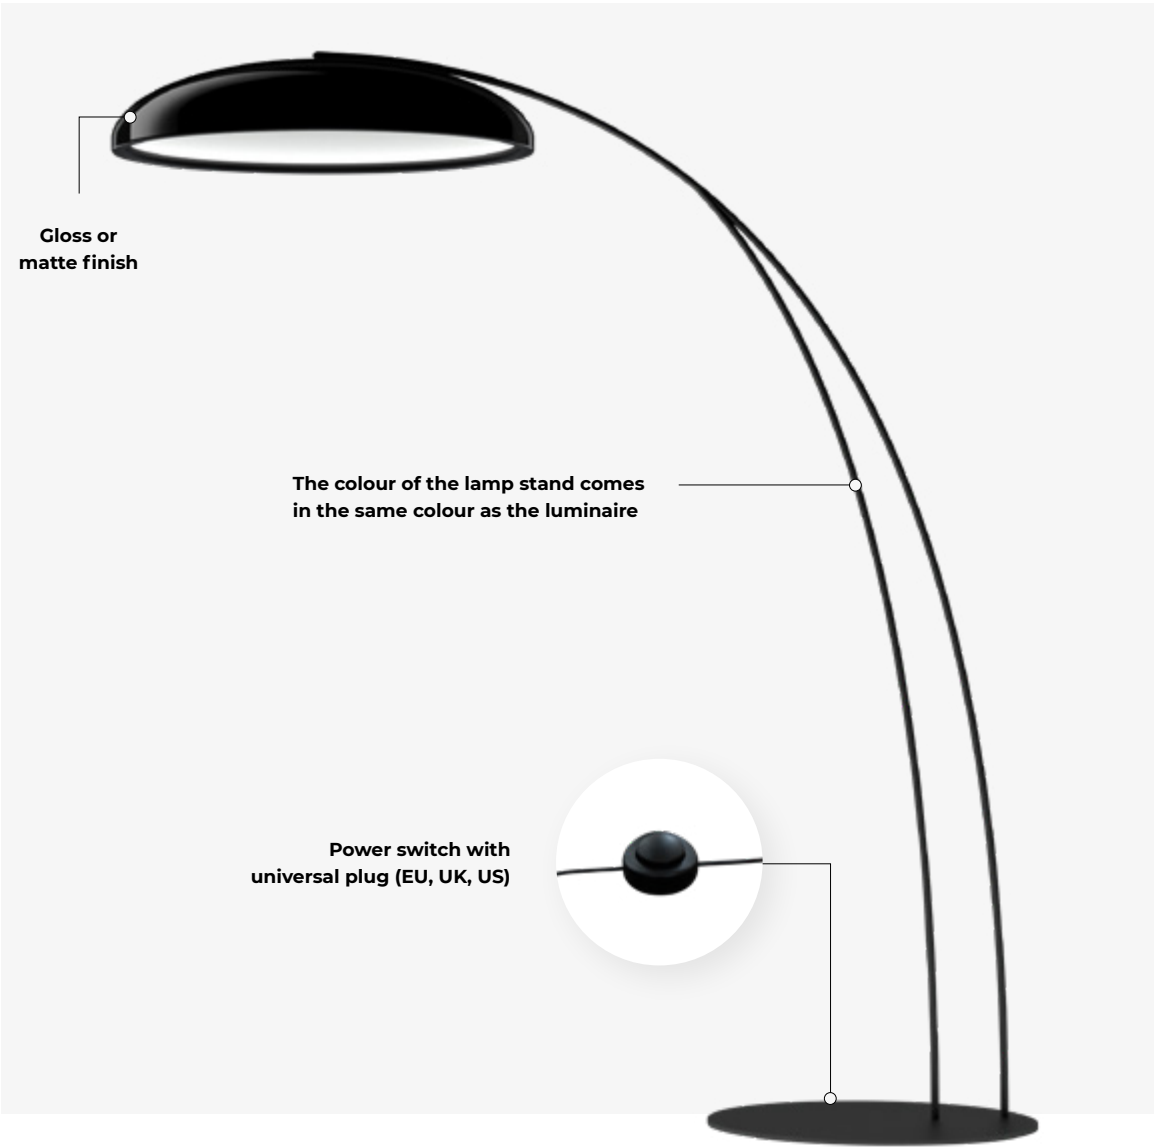



100% clean interior

As the light source is completely hidden under the edge, the interior of the luminaire is clean, with no screws or suspensions.

Dawn
Technical Overview




	S Suspended	F Floor*
Luminaire luminous flux		
Ø600	1700 lm	-
Ø800	2250 lm	2250 lm
Ø1000	3000 lm	-
Light distribution	Soft diffused light	Soft diffused light
LED colour	927, 930, 935, 940	927, 930, 935, 940
Driver	Casambi, DALI, FO	Push dimm
Driver position	Ceiling cup / Remote	Integrated on universal plug
Dimension	DxH (mm): 616x132, 807x173, 1062x220 SH (mm): 1500, 3000, 5000	



The Dawn F base is always in structural black colour.

Standard: **B** **D** **A** **C** Special colours:



Light source: High-flux LED strip, CRI>90, MacAdam≤2, 50000h L90 B10 at 35°C. **Optic:** Perimetric indirect light system with gradient. **Body:** Aluminium, powder coated. **Ceiling cup:** Ceiling cup with or without driver must be ordered separately. **Control gear:** Constant voltage driver - order separately. **Power supply:** 24V DC.

Sorgente: Strip LED High-flux, CRI>90, MacAdam≤2, 50.000h L90 B10 a 35°C. **Ottica:** Luce perimetrale indiretta con profilo inclinato. **Corpo:** Alluminio, verniciatura a polvere. **Rosone:** Rosone con o senza alimentatore da ordinare separatamente. **Alimentazione:** Alimentatore a tensione costante - ordinare separatamente. **Alimentatore:** 24V DC.

Source de luminaire: Haut rendement LED strip, CRI>90, MacAdam≤2, 50000h L90 B10 à 35°C. **Optique:** Système de lumière indirecte périmétrique avec gradient. **Corps:** Revêtement aluminium à poudre. **La patère:** Patère avec ou sans driver doit être commandé séparément. **Alimentation:** Driver à tension constante - à commander séparément. **Alimentation:** 24V DC.