





RI kit for installation without puttying

REVOLUTIONARY TRIM-LESS INSTALLATION

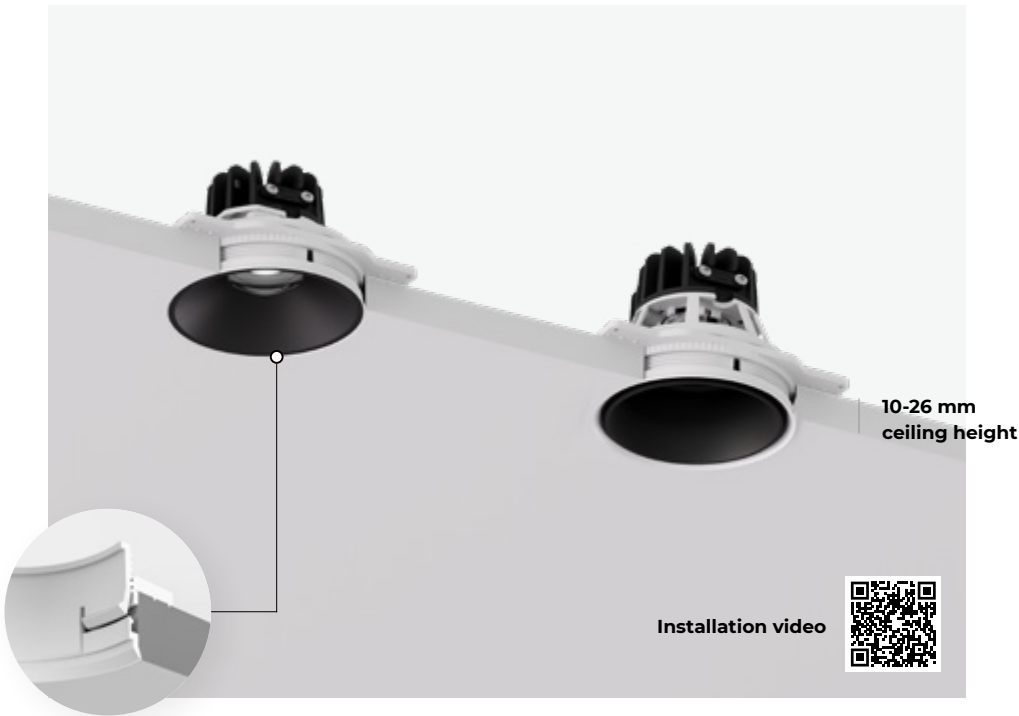

Make a hole with a standard 80 mm hole saw



Paint the ceiling, no puttying needed



Twist and level the RI kit with the ceiling



Click in the spot and the funnel

Conic
Technical Overview



ADJUSTABLE (A)







FIXED (F)



	RI Recessed trim-less	RV Recessed visible trim
Beam angle	20°, 30°, 55°	20°, 30°, 55°
Orientation	25° / 360° (A)	25° / 360° (A)
Luminaire luminous flux	540 - 970 lm	540 - 970 lm
LED colour	927, 930, 935, 940	927, 930, 935, 940
Dynamic light	Dim to warm (D2W)**	Dim to warm (D2W)**
Driver	Casambi, DALI, FO	Casambi, DALI, FO
Driver position	Remote	Remote
IP protection*	IP44	IP44
RI kit / Frame colour	1 2	1 2
Inner colour	1 2 H F Y	1 2 H F Y

Dimensions



*IP value from the exposed side. **Dim to warm is possible on 55°beam angle.



Light source: High-power COB LED, CRI>90, MacAdam≤2, 50.000h L90 B10 at 35°C. **Optic:** Highly efficient with uniform distribution, metalized polycarbonate with lacquer finish. **Body:** Polycarbonate. Optional with metalized coating. **Control gear:** Constant current driver - order separately. **Power supply:** 150 - 900 mA.

Sorgente: High-power COB LED, CRI>90, MacAdam≤2, 50.000h L90 B10 a 35°C. **Ottica:** Ottica ad alta efficienza con distribuzione uniforme, polycarbonato metallizzato tramite laccatura. **Corpo:** Polycarbonato. Opzionale con rivestimento metallizzato. **Alimentazione:** Alimentatore a corrente costante - ordinare separatamente. **Alimentatore:** 150 - 900 mA.

Source de luminaire: LED haute puissance, IRC > 90, MacAdam≤2, 50.000h L90 B10 à 35°C. **Optique:** Haute efficacité avec une distribution uniforme, polycarbonate métallisé avec finition laquée. **Corps:** Polycarbonate. En option avec revêtement métallisé. **Alimentation:** Driver à courant constant - à commander séparément. **Alimentation:** 150 - 900 mA.