



# ENTERO

## FAMILY

### Inside. Outside.

Entero is engineered to perfection, both for interior and exterior applications. It enables architects and designers to achieve style continuity throughout the entire project, applying the same clean sightlines and minimal appearance to damp locations, outside ceilings and cantilevers.

### Intense Energy.


Entero was designed as an answer to the energy of creation. Crafted to add value to spaces and experiences, bringing intensity to lighting schemes. A fusion of power and elegance, comfort and precision. One single range of luminaires to illuminate with power or for atmosphere, from low and high.

Furthermore Entero can also be used as light unit in our **ΔIR** range, a toolset that combines light and ventilation in one.


[www.deltalight.com/entero](http://www.deltalight.com/entero)

1/1

SCALE 1:1

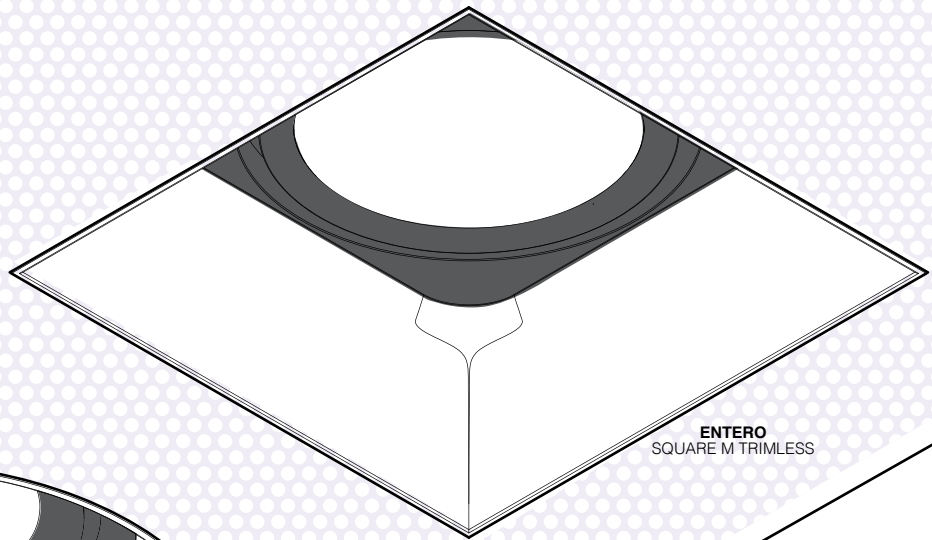

ENTERO  
SQUARE M TRIMLESS

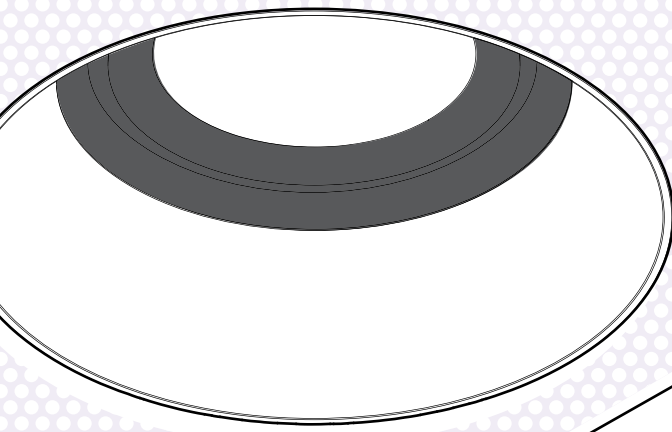

ENTERO  
ROUND M TRIMLESS

## What if there is only one?




### One for All.

Entero is a set of lighting tools enabling architects and designers to create discrete but diverse lighting schemes, using only one luminaire type throughout the entire project.

Any project. Retail, residential, public, hospitality, art... Any need.

Any size. Anywhere.

It is the most complete family, created to excel in any environment.

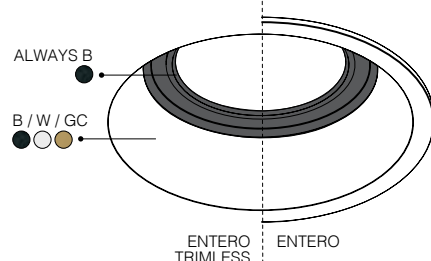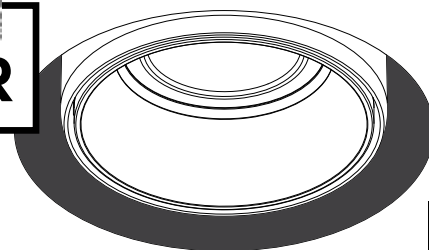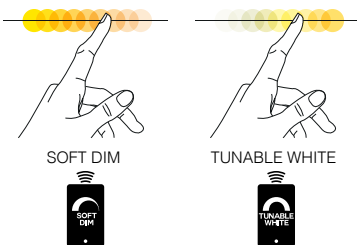

INTERIOR CEILING


|                                         | ENTERO S                                        | ENTERO M                                         | ENTERO L                        |
|-----------------------------------------|-------------------------------------------------|--------------------------------------------------|---------------------------------|
| <b>LIGHT EFFECT</b>                     |                                                 |                                                  |                                 |
| LED                                     | 5,7W - 519lm<br>8,6W - 1089lm<br>12,4W - 1467lm | 8,2W - 677lm<br>17,1W - 2125lm<br>24,6W - 2907lm | 10,7W - 814lm<br>36,5W - 4579lm |
| <b>OPTICS</b>                           |                                                 |                                                  |                                 |
| 10°                                     | •                                               | •                                                | •                               |
| 18°                                     |                                                 | •                                                | •                               |
| 20°                                     | •                                               |                                                  |                                 |
| 30°                                     |                                                 | •                                                | •                               |
| 45°                                     | •                                               | •                                                | •                               |
| WALLWASH                                | •                                               | •                                                | •                               |
| <b>COLOUR TEMPERATURE</b>               |                                                 |                                                  |                                 |
| 2700K                                   | •                                               | •                                                | •                               |
| 3000K                                   | •                                               | •                                                | •                               |
| SOFT DIM 3000-1800K                     | •                                               | •                                                |                                 |
| TUNABLE WHITE 1800-4000K                | •                                               | •                                                | •                               |
| TUNABLE WHITE 2700-6500K                | •                                               | •                                                | •                               |
| <b>CONTROL</b>                          |                                                 |                                                  |                                 |
| EXCL. POWER SUPPLY                      | •                                               | •                                                | •                               |
| NON DIM                                 |                                                 |                                                  |                                 |
| MAINS DIM                               |                                                 |                                                  |                                 |
| 1-10V DIM                               |                                                 |                                                  |                                 |
| DALI DIM                                |                                                 |                                                  |                                 |
| WIRELESS DIM                            |                                                 |                                                  |                                 |
| <b>COLOUR</b>                           |                                                 |                                                  |                                 |
| WHITE ○                                 | •                                               | •                                                | •                               |
| BLACK ●                                 | •                                               | •                                                | •                               |
| GOLD COLOURED ●                         |                                                 | •                                                | •                               |
| <b>SHAPE</b>                            |                                                 |                                                  |                                 |
| ROUND                                   | •                                               | •                                                | •                               |
| SQUARE                                  | •                                               | •                                                | •                               |
| <b>INSTALLATION</b>                     |                                                 |                                                  |                                 |
| INTERIOR                                | RECESSED                                        | •                                                | •                               |
|                                         | RECESSED TRIMLESS                               | •                                                | •                               |
| EXTERIOR                                | RECESSED                                        | •                                                | •                               |
| <b>IP VALUE</b>                         |                                                 |                                                  |                                 |
| IP20 - SUITABLE FOR DRY LOCATIONS       | •                                               | •                                                | •                               |
| IP44 - SUITABLE FOR DAMP LOCATION       | •                                               | •                                                | •                               |
| IP65 - SUITABLE FOR EXTERIOR            | •                                               | •                                                | •                               |
| <b>ACCESSORIES</b>                      |                                                 |                                                  |                                 |
| HONEYCOMB                               | •                                               | •                                                | •                               |
| SPREAD LENS                             | •                                               | •                                                | •                               |
| LINEAR SPREAD LENS                      | •                                               | •                                                | •                               |
| SOFTENING LENS                          | •                                               | •                                                | •                               |
| GLASS SANDBLASTED SBL                   | •                                               | •                                                | •                               |
| <b>MOUNTING KITS</b>                    |                                                 |                                                  |                                 |
| O.F.A. ONE FOR ALL (CONCRETE / PLASTER) | •                                               | •                                                | •                               |
| DEEP CURVED (PLASTERBOARD)              | •                                               |                                                  |                                 |
| ▲IR (LIGHT + VENTILATION)               | •                                               |                                                  |                                 |
| CSC (COLD STRETCHED CEILING)            | •                                               | •                                                | •                               |
| WSC (WARM STRETCHED CEILING)            | •                                               | •                                                | •                               |

R &amp; S

IP20

IP44

IP65

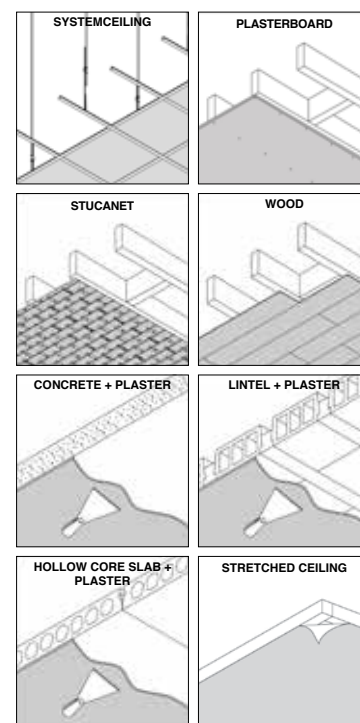

• STANDARD  
• NOT FOR ALL VERSIONS




# ENTERO S



NEW  
ØKIT x 105



NEW  
Ø76 x 100 / max.16



NEW  
KIT x 110



NEW  
76 x 76 x 100 / max.12,5 or 25

## ENTERO SMALL

### ROUND TRIMLESS


### ROUND

### SQUARE TRIMLESS

### SQUARE

|                 |                                |      |     |              |              |              |              |
|-----------------|--------------------------------|------|-----|--------------|--------------|--------------|--------------|
| 3000K<br>CRI>90 | LED [E] 5.7W / 519lm / 500mA   | IP20 | 10° | 28424 9310 ◇ | 28401 9310 ◇ | 28524 9310 ◇ | 28501 9310 ◇ |
|                 | LED [U] 8.6W / 1089lm / 500mA  |      | 20° | 28425 9320 ◇ | 28402 9320 ◇ | 28525 9320 ◇ | 28502 9320 ◇ |
|                 | LED [U] 12.4W / 1467lm / 700mA |      | 45° | 28425 9330 ◇ | 28402 9330 ◇ | 28525 9330 ◇ | 28502 9330 ◇ |
| 2700K<br>CRI>90 | LED [E] 5.7W / 519lm / 500mA   |      | 10° | 28424 9210 ◇ | 28401 9210 ◇ | 28524 9210 ◇ | 28501 9210 ◇ |
|                 | LED [U] 8.6W / 1041lm / 500mA  |      | 20° | 28425 9220 ◇ | 28402 9220 ◇ | 28525 9220 ◇ | 28502 9220 ◇ |
|                 | LED [U] 12.4W / 1403lm / 700mA |      | 45° | 28425 9230 ◇ | 28402 9230 ◇ | 28525 9230 ◇ | 28502 9230 ◇ |
| SOFT DIM        | 3000-1800K / CRI>90            |      | 20° | 28482 9020 ◇ | 28480 9020 ◇ | 28582 9020 ◇ | 28580 9020 ◇ |
|                 | LED [X] 10.2W / 1038lm / 500mA |      | 45° | 28482 9030 ◇ | 28480 9030 ◇ | 28582 9030 ◇ | 28580 9030 ◇ |
|                 | 4000-1800K / CRI>90            |      | 20° | 28464 9020 ◇ | 28456 9020 ◇ | 28564 9020 ◇ | 28556 9020 ◇ |
| TUNABLE WHITE   | LED [Y] 9W / 979lm / 500mA     |      | 45° | 28464 9030 ◇ | 28456 9030 ◇ | 28564 9030 ◇ | 28556 9030 ◇ |
|                 | 6500-2700K / CRI>90            |      | 20° | 28427 9020 ◇ | 28404 9020 ◇ | 28527 9020 ◇ | 28504 9020 ◇ |
|                 | LED [Y] 9W / 1087lm / 500mA    |      | 45° | 28427 9030 ◇ | 28404 9030 ◇ | 28527 9030 ◇ | 28504 9030 ◇ |


◇ B ● / GC ● / W ○




NEW  
ØKIT x 115



NEW  
Ø76 x 115 / max.16



NEW  
KIT x 120



NEW  
76 x 76 x 115 / max.12,5 or 25

## ENTERO SMALL IP

### ROUND TRIMLESS

### ROUND

### SQUARE TRIMLESS

### SQUARE

|                 |                                |      |     |              |              |              |              |
|-----------------|--------------------------------|------|-----|--------------|--------------|--------------|--------------|
| 3000K<br>CRI>90 | LED [U] 8.6W / 1089lm / 500mA  | IP44 | 20° | 28450 9320 ◇ | 28406 9320 ◇ | 28550 9320 ◇ | 28506 9320 ◇ |
|                 |                                |      | 45° | 28450 9330 ◇ | 28406 9330 ◇ | 28550 9330 ◇ | 28506 9330 ◇ |
| 2700K<br>CRI>90 | LED [U] 8.6W / 1041lm / 500mA  |      | 20° | 28450 9220 ◇ | 28406 9220 ◇ | 28550 9220 ◇ | 28506 9220 ◇ |
|                 |                                |      | 45° | 28450 9230 ◇ | 28406 9230 ◇ | 28550 9230 ◇ | 28506 9230 ◇ |
| SOFT DIM        | 3000-1800K / CRI>90            |      | 20° | 28484 9020 ◇ | 28481 9020 ◇ | 28584 9020 ◇ | 28581 9020 ◇ |
|                 | LED [X] 10.2W / 1038lm / 500mA |      | 45° | 28484 9030 ◇ | 28481 9030 ◇ | 28584 9030 ◇ | 28581 9030 ◇ |
| TUNABLE WHITE   | 4000-1800K / CRI>90            |      | 20° | 28472 9020 ◇ | 28459 9020 ◇ | 28572 9020 ◇ | 28559 9020 ◇ |
|                 | LED [Y] 9W / 979lm / 500mA     |      | 45° | 28472 9030 ◇ | 28459 9030 ◇ | 28572 9030 ◇ | 28559 9030 ◇ |
|                 | 6500-2700K / CRI>90            |      | 20° | 28452 9020 ◇ | 28408 9020 ◇ | 28552 9020 ◇ | 28508 9020 ◇ |
|                 | LED [Y] 9W / 1087lm / 500mA    |      | 45° | 28452 9030 ◇ | 28408 9030 ◇ | 28552 9030 ◇ | 28508 9030 ◇ |


◇ B ● / GC ● / W ○




NEW  
ØKIT x 95



NEW  
Ø76 x 95 / max.16



NEW  
KIT x 95



NEW  
76 x 76 x 95 / max.12,5 or 25

## ENTERO SMALL WALLWASH

### ROUND TRIMLESS

### ROUND


### SQUARE TRIMLESS

### SQUARE

|                 |                               |      |           |              |              |              |              |
|-----------------|-------------------------------|------|-----------|--------------|--------------|--------------|--------------|
| 3000K<br>CRI>90 | LED [U] 8.6W / 1089lm / 500mA | IP20 | WALL-WASH | 28428 9300 ◇ | 28405 9300 ◇ | 28528 9300 ◇ | 28505 9300 ◇ |
| 2700K<br>CRI>90 | LED [U] 8.6W / 1041lm / 500mA |      |           | 28428 9200 ◇ | 28405 9200 ◇ | 28528 9200 ◇ | 28505 9200 ◇ |
| SOFT DIM        | 4000-1800K / CRI>90           |      |           | 28465 9000 ◇ | 28457 9000 ◇ | 28565 9000 ◇ | 28557 9000 ◇ |
|                 | LED [Y] 9W / 979lm / 500mA    |      |           |              |              |              |              |
| TUNABLE WHITE   | 6500-2700K / CRI>90           |      |           | 28466 9000 ◇ | 28458 9000 ◇ | 28566 9000 ◇ | 28558 9000 ◇ |
|                 | LED [Y] 9W / 1087lm / 500mA   |      |           |              |              |              |              |


◇ B ● / GC ● / W ○



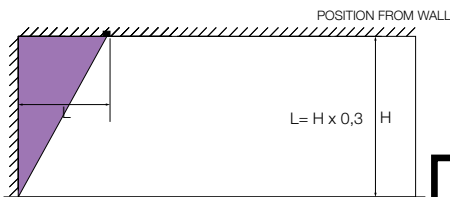



example:  $H = 3000 \text{ mm} \rightarrow L = 3000 \text{ mm} \times 0,30 = 900 \text{ mm}$

## WALLWASH

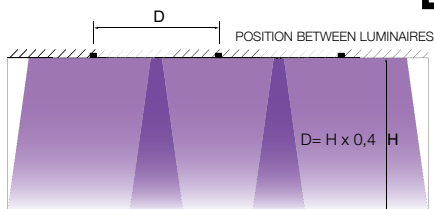

example:  $H = 3000 \text{ mm} \rightarrow D = 3000 \text{ mm} \times 0,4 = 1200 \text{ mm}$

## CURVED

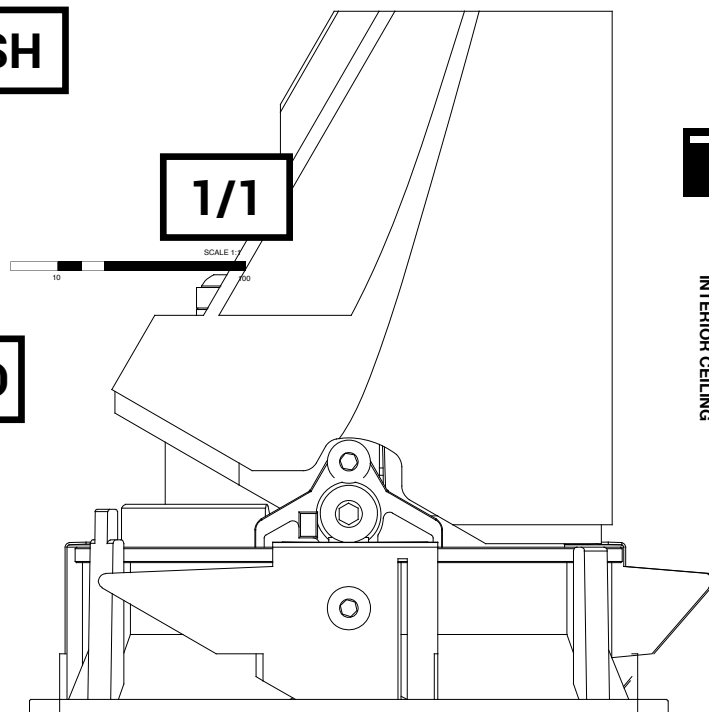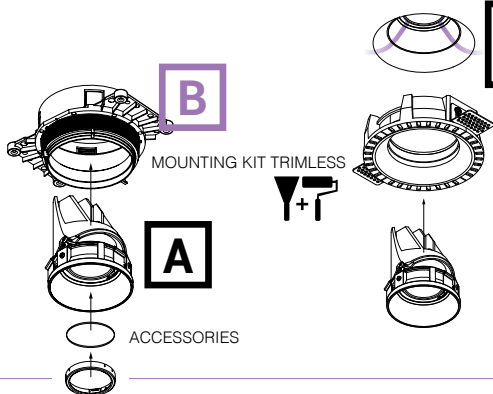

INTERIOR CEILING

### FINISH YOUR SPECIFICATION

### REQUIREMENT / OPTION / ACCESSORY

| SMALL    |   |   |   | SMALL IP |   |   |   | SMALL WALLWASH |   |   |   |
|----------|---|---|---|----------|---|---|---|----------------|---|---|---|
| TRIMLESS |   |   |   | TRIMLESS |   |   |   | TRIMLESS       |   |   |   |
| ●        | ■ | ● | ■ | ●        | ■ | ● | ■ | ●              | ■ | ● | ■ |

#### LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

|                        |           |                   |         |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------------|-----------|-------------------|---------|---|---|---|---|---|---|---|---|---|---|---|---|
| MAINS DIM (FE)         | <b>11</b> | <b>21012 0298</b> | min. 55 | R | R | R | R | R | R | R | R | R | R | R | R |
| 1-10V DIM              | <b>15</b> | <b>300 90 124</b> | min. 55 | R | R | R | R | R | R | R | R | R | R | R | R |
| DALI DIM               | <b>14</b> | <b>300 90 125</b> | min. 55 | R | R | R | R | R | R | R | R | R | R | R | R |
| TUNABLE WHITE DALI DT8 | <b>20</b> | <b>21012 0355</b> | min. 86 | R | R | R | R | R | R | R | R | R | R | R | R |

#### MOUNTING KIT TRIMLESS

|                         |                   |               |   |   |  |  |   |   |  |  |   |   |  |  |  |
|-------------------------|-------------------|---------------|---|---|--|--|---|---|--|--|---|---|--|--|--|
| CONCRETE / PLASTERBOARD | <b>28400 0010</b> |               | R |   |  |  | R |   |  |  | R |   |  |  |  |
|                         | <b>28400 0040</b> |               |   | R |  |  |   | R |  |  |   | R |  |  |  |
| PLASTERBOARD            | <b>28500 0220</b> | Curved shaped | R |   |  |  |   |   |  |  |   |   |  |  |  |
| COLD STRETCHED CEILING  | <b>28400 0070</b> |               | R |   |  |  | R |   |  |  | R |   |  |  |  |
|                         | <b>28400 0100</b> |               |   | R |  |  |   | R |  |  |   | R |  |  |  |
| WARM STRETCHED CEILING  | <b>28400 0130</b> |               | R |   |  |  | R |   |  |  | R |   |  |  |  |
|                         | <b>28400 0160</b> |               |   | R |  |  |   | R |  |  |   | R |  |  |  |

#### or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER

|                          |                   |                   |   |  |  |  |   |  |  |  |   |  |  |  |  |
|--------------------------|-------------------|-------------------|---|--|--|--|---|--|--|--|---|--|--|--|--|
| PLASTERBOARD<br>SIDE AIR | <b>29810 0110</b> | Light+Ventilation | R |  |  |  | R |  |  |  | R |  |  |  |  |
|                          | <b>29810 0120</b> | Light             | R |  |  |  | R |  |  |  | R |  |  |  |  |
|                          | <b>29810 0100</b> | Ventilation       | O |  |  |  | O |  |  |  | O |  |  |  |  |
| CONCRETE<br>TOP AIR      | <b>29810 0130</b> | Light+Ventilation | R |  |  |  |   |  |  |  | R |  |  |  |  |
|                          | <b>29810 0120</b> | Light             | R |  |  |  |   |  |  |  | R |  |  |  |  |
|                          | <b>29810 0200</b> | Ventilation       | O |  |  |  |   |  |  |  | O |  |  |  |  |

#### HONEYCOMB / GLASS / LENS

|                      |                     |           |     |     |     |     |  |  |  |  |  |  |  |  |  |
|----------------------|---------------------|-----------|-----|-----|-----|-----|--|--|--|--|--|--|--|--|--|
| HONEYCOMB SINGLE USE | <b>28500 0050 B</b> | Max.500mA | A   | A   | A   | A   |  |  |  |  |  |  |  |  |  |
| HONEYCOMB DOUBLE USE | <b>28500 0060 B</b> | Max.500mA | A * | A * | A * | A * |  |  |  |  |  |  |  |  |  |
| LINEAR SPREAD LENS   | <b>28500 0010</b>   | Max.500mA | A * | A * | A * | A * |  |  |  |  |  |  |  |  |  |
| SPREAD LENS          | <b>28500 0020</b>   | Max.500mA | A * | A * | A * | A * |  |  |  |  |  |  |  |  |  |
| SOFTENING LENS       | <b>28500 0030</b>   | Max.500mA | A * | A * | A * | A * |  |  |  |  |  |  |  |  |  |
| GLASS SBL            | <b>28500 0040</b>   | Max.500mA | A * | A * | A * | A * |  |  |  |  |  |  |  |  |  |

#### INSTALLATION

|                              |                   |  |  |  |  |   |  |  |  |  |   |  |  |   |  |
|------------------------------|-------------------|--|--|--|--|---|--|--|--|--|---|--|--|---|--|
| MOUNTING SET S2 FOR CONCRETE | <b>28500 0190</b> |  |  |  |  | O |  |  |  |  | O |  |  | O |  |
|------------------------------|-------------------|--|--|--|--|---|--|--|--|--|---|--|--|---|--|

\* NOT FOR 10° BEAM ANGLE

B