

NIME PATENTED

Design by **DEAN SKIRA** & Delta Light

The black hole reflects no light, but the light of Nime finds its way out.
The tangible part disappears inside its heart, and the intangible part illuminates the object.

www.deltalight.com/nime



The fifth form of light


The first form of light is
in the source.

The second is
the invisible form of light itself.

The third is the form of the object revealed
by light before it touches it,
the fourth is the form of the shadow.


And the fifth is the form of the consequence that
comprises all the previous four forms, as well as the
way we feel and experience the space considering
the four forms.

FOCUS




Requires access
above ceiling

Ø54 x 90
max.9,5-12,5




0-30° 355°

ØKIT x 90




0-30° 360°

Ø67 x 90
max.12,5



ØKIT x 90



ØKIT x 150

NIME

NEW

II TRIMLESS

NEW

II TRIMLESS OK

NEW

II

NEW

II AIR

TRIMLESS

3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	IP20	35°				26412 9320 ◇	
	LED [E] 8.2W / 677lm / 700mA			26413 9320 ◇	26415 9320 ◇	26414 9320 ◇		
	LED [E] 5.7W / 519lm / 500mA		52°				26412 9330 ◇	
	LED [E] 8.2W / 677lm / 700mA			26413 9330 ◇	26415 9330 ◇	26414 9330 ◇		
	LED [E] 10.7W / 814lm / 900mA		FOCUS 20°-50°					26411 9300 ◇
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA		35°				26412 9220 ◇	
	LED [E] 8.2W / 677lm / 700mA			26413 9220 ◇	26415 9220 ◇	26414 9220 ◇		
	LED [E] 5.7W / 519lm / 500mA		52°				26412 9230 ◇	
	LED [E] 8.2W / 677lm / 700mA			26413 9230 ◇	26415 9230 ◇	26414 9230 ◇		
	LED [E] 10.7W / 814lm / 900mA		FOCUS 20°-50°					26411 9200 ◇
				◇ PRIM	◇ PRIM	◇ B ● / W ○	◇ PRIM	◇ PRIM




The absence in its presence, the presence in its absence.

A GLIMPSE OF ME
ON PAGE 6



FIND ME ONLINE

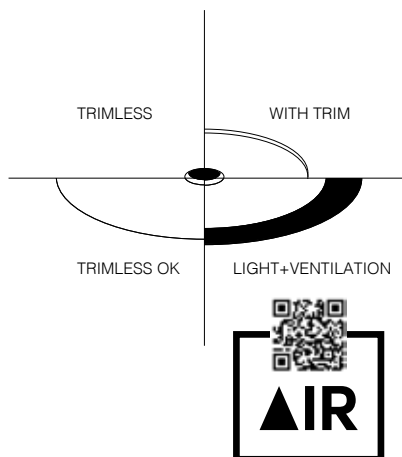

Better not underestimate Nime,
as the aperture of only 10mm is only the façade that hides away a
host of possibilities to control your beam. Within the same opening
and thanks to an ingenious set of custom optics, Nime allows
you to focus the beam from 20° up to 40° and offers rotation up
to 355° and tilting up to 30°, without changing its looks. With this
magic trick, Nime lets you:
Emphasize objects on vertical and horizontal surfaces, without
visual appearance of the fitting or its source

Light up small to large objects,
even when they are not aligned with the luminaire.

Perfectly address the light where
it is needed, even in slope ceilings.

Create equal circles of light from
both low and higher ceilings.

Furthermore Nime can also be used as light unit in our **AIR** range,
a toolset that combines light and ventilation in one.



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				NIME				
				II TRIMLESS	II TRIMLESS OK	II	II AIR	TRIMLESS
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	21012 0298	i min. 55	R *	R	R	R	R *	R
1-10V DIM 15	300 90 124	i min. 55	R *	R	R	R	R *	R
DALI DIM 14	300 90 125	i min. 55	R *	R	R	R	R *	R
MOUNTING KIT TRIMLESS								
CONCRETE / PLASTERBOARD	26410 0010				R			R
MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER								
PLASTERBOARD SIDE AIR	29810 0110	Light+Ventilation					R	
	29810 0120	Light					R	
	29810 0100	Ventilation					O	
CONCRETE TOP AIR	29810 0130	Light+Ventilation					R	
	29810 0120	Light					R	
	29810 0200	Ventilation					O	

* REMOTE INSTALLATION

INTERIOR CEILING

B