

CARREE

The Carree range is Delta Light's answer for easy-to-install, timeless and functional recessed spots, as it has been a Delta Light classic for many years. This family of square recessed luminaires offers refined solutions with integrated LED, either with or without trim. The straight lines in the design make a contemporary spot out of Carree, not only useful in modern architecture but also in many other applications. Carree can be used throughout the entire project, as it also includes IP44 solutions for bathrooms and even IP65 luminaires for outdoor use


www.deltalight.com/carree

IP23 IP44


FIX VS OK
OK = SHORT FOR ADJUSTABLE

CARREE
ST OK LED


1/1




∅ KIT x 75



∅ KIT x 85



75 x 75 x 80 / max.35




75 x 75 x 80 / max.35

CARREE


TRIMLESS LED IP TRIMLESS OK LED ST LED IP ST OK LED

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	202 511 811 932 ◊		11045 9320 ◊	
	LED [H] 10.4W / 1128lm / 500mA	IP23			202 510 811 932 ◊		11046 9320 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44	45°	202 511 811 922 ◊		11045 9220 ◊	
	LED [H] 10.4W / 1083lm / 500mA	IP23			202 510 811 922 ◊		11046 9220 ◊
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23		11049 9030 ◊			11048 9030 ◊
				◊ W ○	◊ B ● / W ○	◊ W ○	◊ B ● / W ○






SOFT DIM

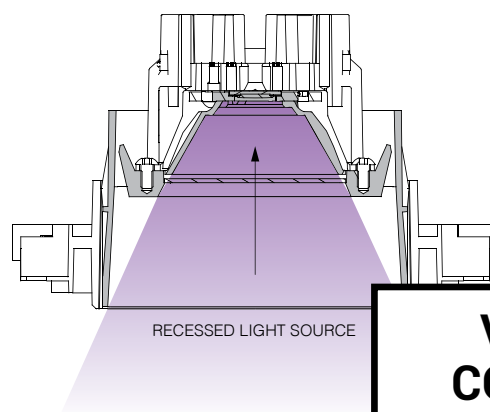

VISUAL COMFORT

B

O.F.A.
ONE FOR ALL
MOUNTING KIT TRIMLESS
FOR CONCRETE
& PLASTERBOARD

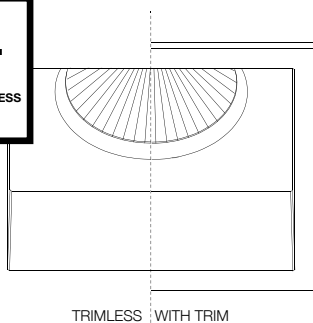

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			CARREE			
			TRIMLESS		ST	
			LED IP	OK LED	LED IP	OK LED
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	<i>i</i> min. 55	R	R	R	R
1-10V DIM 15	300 90 124	<i>i</i> min. 55	R	R	R	R
DALI DIM 14	300 90 125	<i>i</i> min. 55	R	R	R	R
MOUNTING KIT TRIMLESS						
CONCRETE / PLASTERBOARD	202 01 75 OFA		R	R		
	202 01 75		R	R		
PLASTERBOARD	202 00 75				O	O
INSTALLATION						
PLASTERKIT	207 01 161				O	O
CONCRETE BOX	270 11 161				O	O