



Sequal

Specialised in optics

Efficiency and quality can go a long way

Sequal is a true superstar in the field of industrial lighting. It offers uniform professional lighting and is easy to install.

It is powerful enough to be installed on different heights. Unlike other luminaires Sequal is much more efficient in focusing the light, without making compromises with its looks. It's clean, it's minimal, it's super slim.

Efficienza e qualità possono arrivare molto lontano

Sequal è una vera e propria celebrità nel settore dell'illuminazione industriale poiché non solo offre un'illuminazione uniforme e professionale, ma è anche facile da installare.

Vanta una potenza tale da potere essere installata ad altezze diverse. A differenza di altri apparecchi di illuminazione, Sequal dimostra un'efficienza superiore nel concentrare la luce senza scendere a compromesso con l'estetica: le sue linee sono pulite, essenziali ed estremamente slanciate.


Efficacité et qualité peuvent aller loin

Sequal est une véritable superstar dans le domaine de l'éclairage industriel. Il offre un éclairage professionnel uniforme et est facile à installer.


Il est suffisamment puissant pour être installé à différentes hauteurs. Contrairement à d'autres luminaires, Sequal est beaucoup plus efficace pour concentrer la lumière, sans faire de compromis sur son apparence. C'est propre, c'est minimal, c'est super mince.





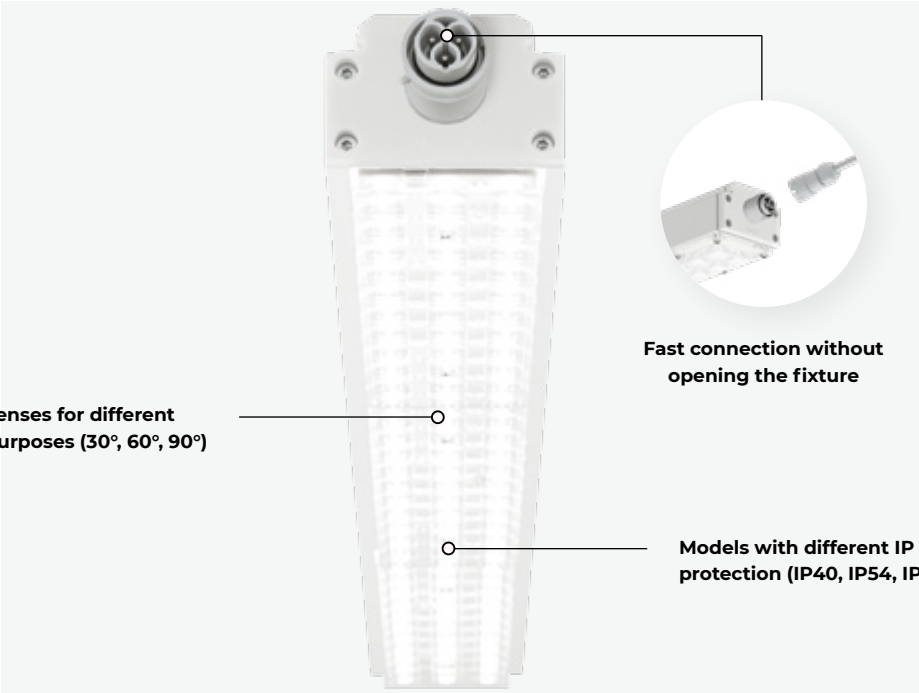

MAIN FEATURES

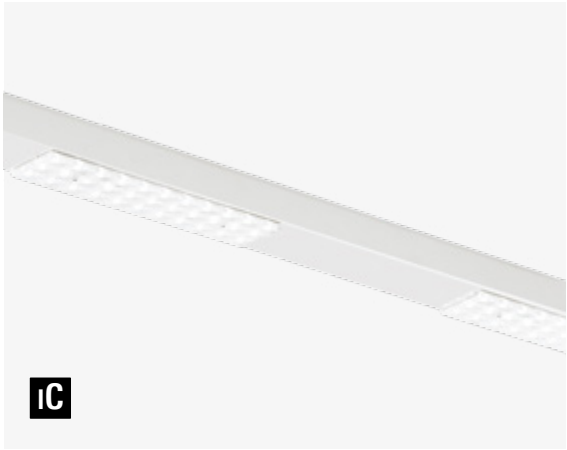


Choose your optimal line configuration

With different combination of blind and luminous modules you can select optimal configuration for project needs. Single system connection and plug-in connectors between various line modules ensure fast and cost-effective installation.

IP protection for different needs

Choose among IP40, IP54 or IP65 to match your ambience needs, from clean warehouses to hars production plants, where dust protection fixtures are required.

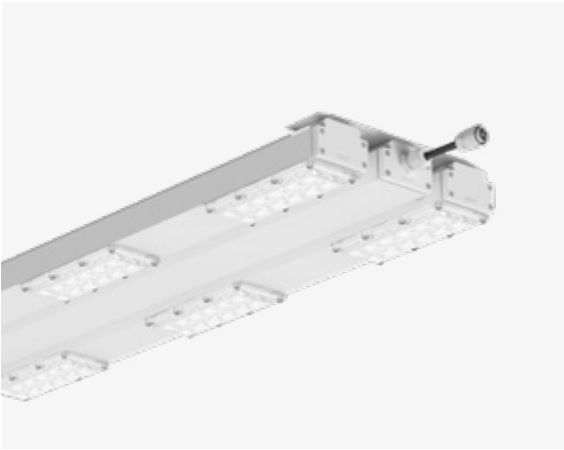

Sequal

Technical Overview



	IP40 LL*	IP54	IP65 2 modules	IP65 4 modules	IP65 2+2 modules	IP65 3+3 modules
Installation	Suspended	Ceiling / Suspended	Ceiling / Suspended	Ceiling / Suspended	Ceiling / Suspended	Ceiling / Suspended
Luminaire luminous flux	1700 - 4800 lm/m	6500 - 8900 lm/m	7800 - 8300 lm	15000 - 15800 lm	15700 - 16600 lm	23500 - 24800 lm
Optics	30°, 60°, 90°	30°, 60°, 90°	30°, 60°, 90°	30°, 60°, 90°	30°, 60°, 90°	30°, 60°, 90°
LED colour	830, 840	830, 840	830, 840	830, 840	830, 840	830, 840
Driver	DALI, FO	DALI, FO	DALI, FO	DALI, FO	DALI, FO	DALI, FO
Emergency kit	EM spot 1h/3h with corridor/ symmetric optic	-	-	-	-	-
IP protection	IP40	IP54	IP65	IP65	IP65	IP65
IK protection	IK 05	IK 05	IK 07, Ballproof	IK 07, Ballproof	IK 07, Ballproof	IK 07, Ballproof
Ambient temperature	from -25° to +45°	from -25° to +45°	from -25° to +45°	from -25° to +45°	from -25° to +45°	from -25° to +45°
Colour	1 2	1 2	1 2	1 2	1 2	1 2
Dimensions	L (mm): 2000, 3000	L (mm): 1215 - 3009	770 158 74	1240 158 74	500 174 266	900 174 266
LL 2 LL 3 LL 4 LL 5* *available only for 3000 mm						

* Use Intra Constructor PRO to design Sequal IP40 LL / Available also as a ball-proof version in accordance with DIN 18032-3 and DIN EN 13964

IC

Design the system with
intraConstructorPRO

≥ 90 %

GR1

WARRANTY

22

Light source: High-flux PCB LED modules, mid-power SMD LED, CRI>80, MacAdam≤2, 50.000h L80 B10 at 35°C. / High-power LED, CRI>80, MacAdam≤2, 50.000h L80 B10 at 35°C. **Optic:** Highly efficient acrylic optical lenses. **Body:** Extruded aluminium profile, powder coated. **Ceiling cup:** For suspended versions, the ceiling cup and suspension set must be ordered separately. Find out more on the technical pages or online product configurator. **Control gear:** Integrated highly-efficient driver with fixed output (FO) or dimmable (DALI). **Emergency:** Emergency kit version with autonomy 1h or 3h. **Power supply:** 230V 50Hz.

Sorgente: Moduli high-flux PCB LED, mid-power SMD LED, CRI>80, MacAdam≤2, 50.000h L80 B10 a 35°C. / High-power LED, CRI>80, MacAdam≤2, 50.000h L80 B10 a 35°C. **Ottica:** Lenti acriliche ad alta efficienza. **Corpo:** Profilo in alluminio estruso, verniciatura a polvere. **Rosone:** Per le versioni a sospensione, il rosone e il kit di sospensione devono essere ordinati separatamente. Maggiori informazioni nelle pagine relative alle caratteristiche tecniche o sul configuratore del prodotto on line. **Alimentazione:** Alimentatore integrato on/off ad alta efficienza (FO) o dimmerabile (DALI). **Emergenza:** Versione con kit di emergenza, autonomia 1h o 3h. **Alimentatore:** 230V 50Hz.

Source de luminaire: Modules PCB LED haut flux, moyenne puissance SMD LED, IRC>80, MacAdam ≤3, 50.000h, L80 B10. / LED haute puissance, IRC > 80, MacAdam≤2, 50.000h L80 B10 à 35°C. **Optique:** Lentilles optiques acryliques à haute efficacité. **Corps:** Profil en aluminium extrudé, revêtu par poudre. **La patère:** Pour la version suspendue, la patère et les filins de suspension doivent être commandés séparément. **Alimentation:** Driver intégré haute efficience avec sortie fixe (FO) ou gradable (DALI) **Bloc de securite:** Version kit d'urgence avec autonomie 1h ou 3h. **Alimentation:** 230V 50Hz.