



Pixy

Authentically magnetic

Move your table. Pixy will follow

Pixy is never fixed. It is always flexible. Which makes it the perfect choice for restaurants and bars where moving tables is a daily routine. With a small carbon rod and a magnet, you can instantly move and redirect the light without using the ladder. We think that Pixy is nicer when grouped. Combine composition over and over again.

Se sposti il tavolo, Pixy lo segue

Pixy non si fissa. È sempre flessibile. È la soluzione perfetta per ristoranti e bar dove tutti i giorni si devono spostare i tavoli. Non serve la scala, in un attimo puoi spostare e orientare la luce con una tige in carbonio e un magnete. Per noi Pixy dà il massimo quando è in gruppo. Si può comporre e ricombinare a piacere.


Déplacez votre table. Pixy suivra

Pixy n'est jamais fixe. Il est toujours flexible. Ce qui fait de lui le choix idéal pour les restaurants et les bars où le déplacement des tables est une routine quotidienne. Avec une petite tige de carbone et un aimant, vous pouvez instantanément déplacer et rediriger la lumière sans utiliser l'échelle. Nous pensons que Pixy est plus joli lorsqu'il est groupé. Combinez la composition encore et encore.







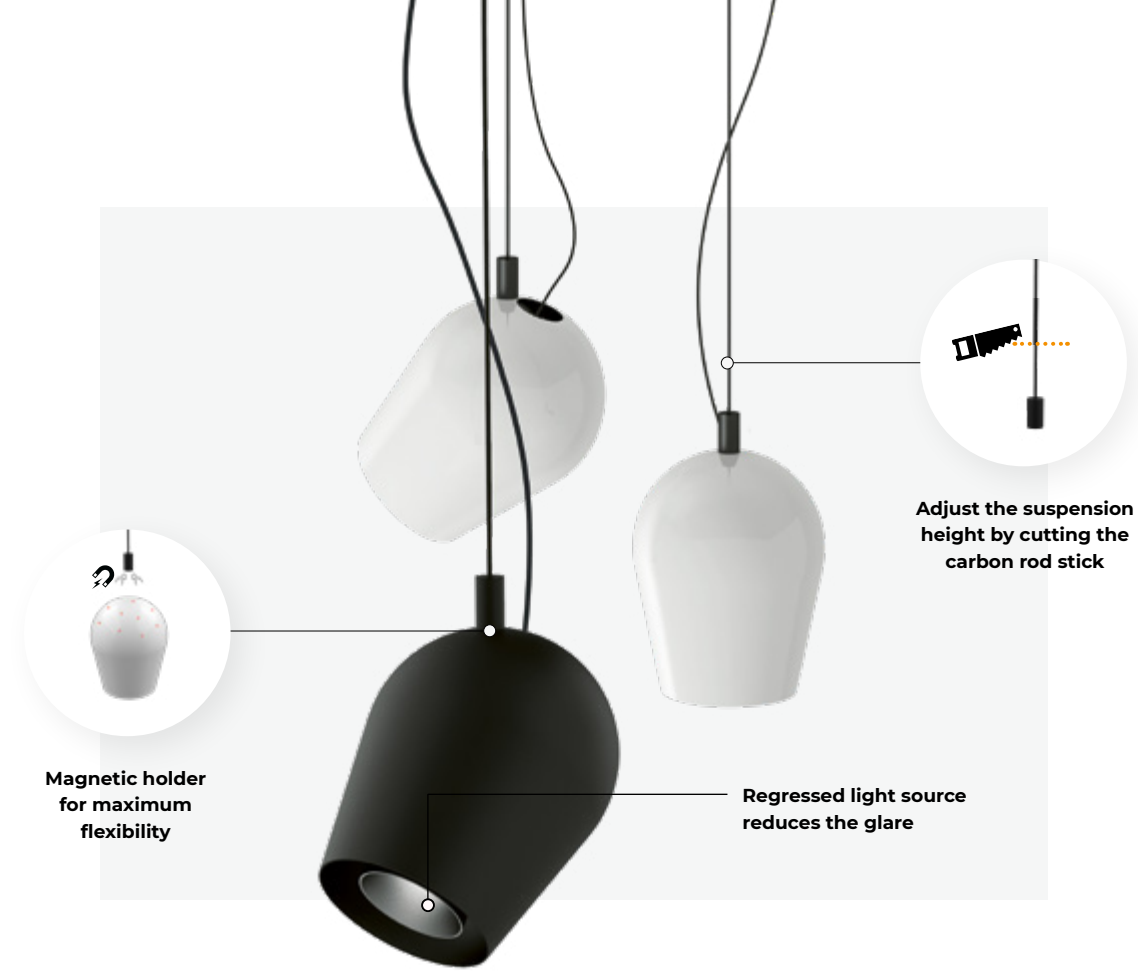

MAIN FEATURES



Step-less orientation

The magnet allows step-less orientation. This gives you freedom when moving and redirecting the light to the desired position. It comes very useful in situations where moving furniture is a daily routine.




Aesthetic solution for concrete ceilings

The driver is integrated into the ceiling cup, so it is appropriate for installing it when you can't have a remote driver. Thanks to the magnets, Pixy can be simply adjusted to the desired direction.

Combine your favourite composition

With cluster installation you can combine up to seven spots. Cables can become part of the design and remote power-in position will no longer be a problem.

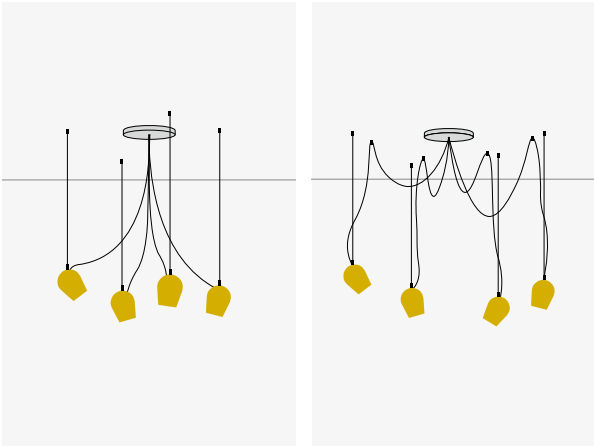

One bar, 3 or 5 spots

Why having many single ceiling cups when you can have only one aesthetic bar with integrated driver? 3 or 5 spots can be flexibly rotated and dimmed.








Pixy

Technical Overview



	S Suspended	C/W Ceiling / Wall	C/W D Ceiling / Wall with integrated driver	C/W-BAR 3 Ceiling / Wall with integrated driver	C/W-BAR 5 Ceiling / Wall with integrated driver
Beam angle	30°, 50°	30°, 50°	30°, 50°	30°, 50°	30°, 50°
Orientation	± 95° / 360°	± 58° / 360°	± 58° / 360°	± 58° / 360°	± 58° / 360°
Luminaire luminous flux	690 - 1550 lm	690 - 1550 lm	690 - 1550 lm	3x 690 - 1550 lm	5x 690 - 1550 lm
LED colour	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940
Driver	Casambi, DALI, FO	Casambi, DALI, FO	Casambi, DALI, FO	Casambi, DALI, FO	Casambi, DALI, FO
Driver position	Ceiling cup / Remote	Remote	Ceiling cup	Ceiling bar	Ceiling bar
Dimensions	SH (mm): 500 - 2000				



Standard: **B** **D** **A** **C** Special colours:



≥ 90 %

GR1

CASAMBI



WARRANTY



Light source: High-power COB LED, CRI>90, MacAdam≤2, 50.000h L90 B10 a 35°C. **Optic:** Highly efficient with uniform distribution, metalized polycarbonate with lacquer finish. **Body:** Steel-sheet, powder coated. **Ceiling cup:** Ceiling cup with or without driver or ceiling bar with integrated driver must be ordered separately. **Control gear:** Constant current driver (order separately). In the Pixy C Bar integrated highly-efficient driver with fixed output (FO) or dimmable (DALI-TD, Casambi). **Power supply:** 250 - 450mA / 230V 50Hz.

Sorgente: COB LED High-power, CRI>90, MacAdam≤2, 50.000h L90 B10 a 35°C. **Ottica:** Ottica ad alta efficienza con distribuzione uniforme, policarbonato metallizzato tramite laccatura. **Corpo:** Lamiera d'acciaio, verniciatura a polvere. **Rosone:** Rosone con o senza alimentatore da ordinare separatamente o sistema C BAR con alimentatore integrato da ordinare separatamente. **Alimentazione:** Alimentatore a corrente costante (ordinare separatamente). Nella Pixy C Bar è compreso alimentatore ON-OFF (FO) o dimmerabile (DALI-TD, Casambi). **Alimentatore:** 250 - 450mA / 230V 50Hz.

Source de luminaire: LED haute puissance, IRC > 90, MacAdam≤2, 50.000h L90 B10 à 35°C. **Optique:** Haute efficacité avec une distribution uniforme, polycarbonate métallisé avec finition laquée (moyen, large). **Corps:** Tôle d'acier, revêtement par poudre. **La patère:** Patère avec ou sans le ballast ou la barre de plafond avec ballast intégré doit être commandé séparément. **Alimentation:** Driver à courant constant - à commander séparément. **Alimentation:** 250 - 450mA / 230V 50Hz.